




Foam Concrete Limited - Typical Site Footprint (trailer-mounted pump unit)

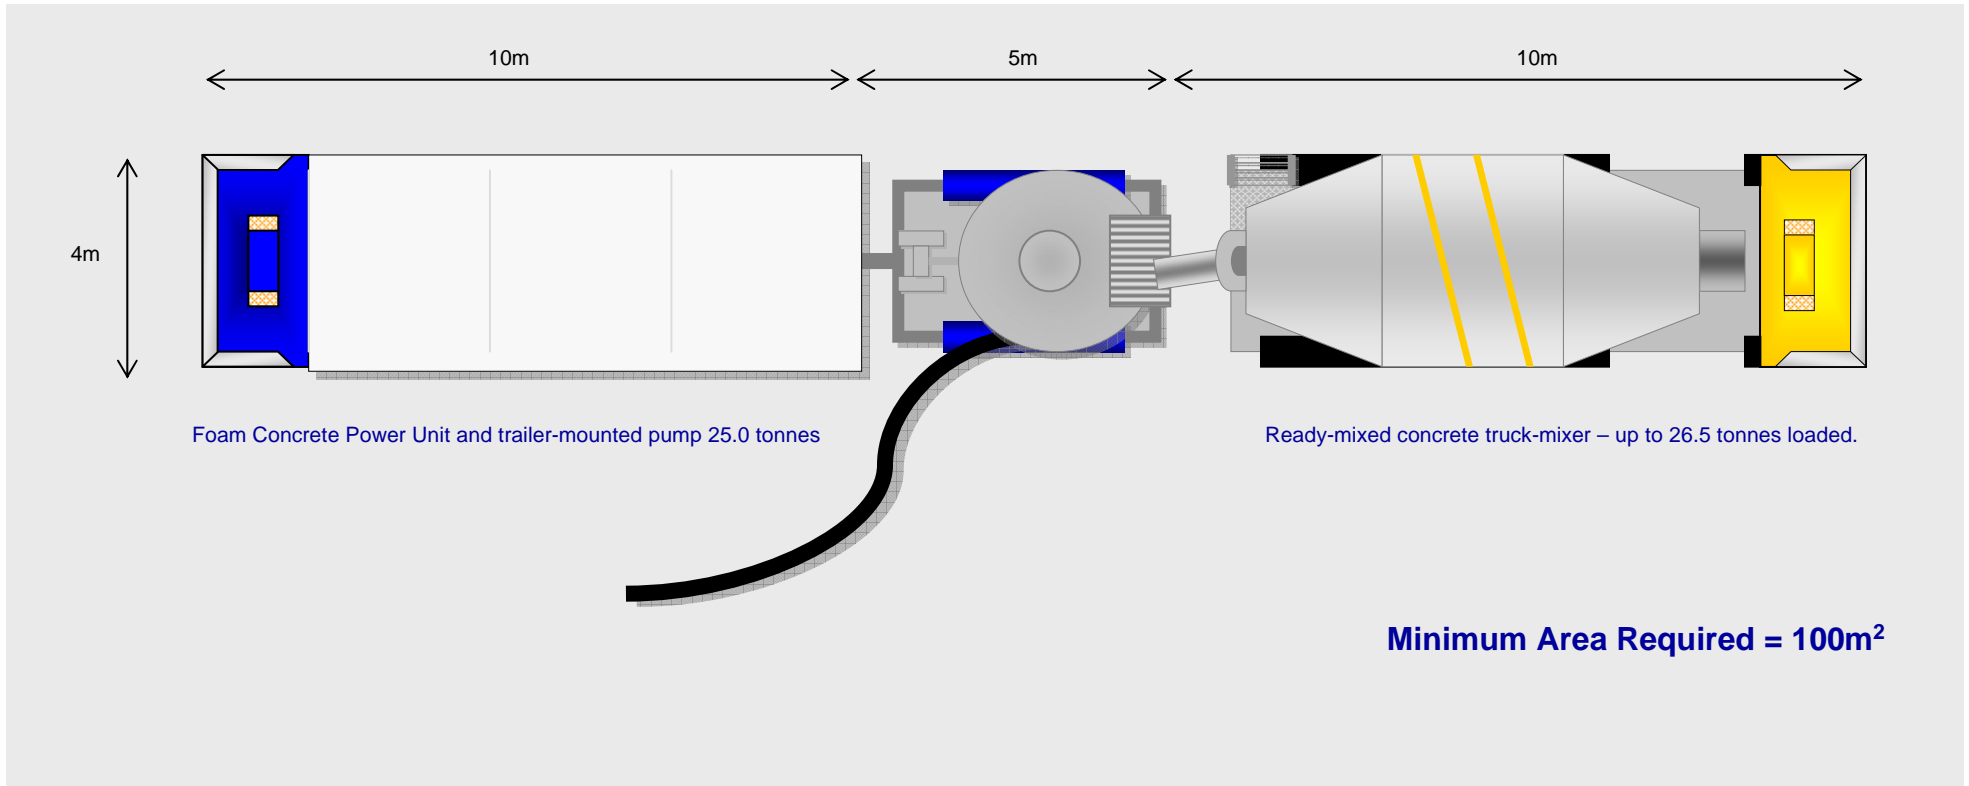

What we need from you:

- Sufficient room for tractor unit to bring power unit and pump to site and place in position
- Secure, stable and level site to accommodate power unit and pump @ 25.0 tonnes
- Sufficient room to allow ready-mixed concrete truck-mixers @ 26.5 tonnes each, to manoeuvre and discharge into pump
- Clean water supply via 50mm main (required on some contracts only)

This illustration is not to scale and is for information only